



Nap-Gard®

7-2555

High Tg Fusion Bonded Epoxy

Revised: 26 October 2022

DESCRIPTION

Nap-Gard® Product No. 7-2555 is a thermosetting epoxy powder designed for use as a corrosion barrier coating for underground and sub-sea pipeline service. It can be used as a primer (8-10 mils) for multilayer (three layer PP and dual powder FBE) system or a single layer FBE. In service, the coating is capable of withstanding continuous operating temperatures of 155°C (311°F).

TYPICAL POWDER PROPERTIES

Color:	Reddish Brown	Theoretical Coverage:	135.4 Ft ² /lb/mil
Specific Gravity:	1.42 ± .05	Density:	1420 ± 50 g/L
		CSA Z245.20-22	
	7-2555	7-2555LG	
Typical Gel Time:	9 ± 2 seconds	19 ± 4 seconds	
CSA Z245.20-22			
@ 205°C (401°F)			
Shelf Life*:	9 months	9 months	
@ 25°C (77°F)			
@ 50% RH			
Thermal Characteristics		7-2555	7-2555LG
CSA Z245.20-22	T _{g1}	63 ± 8°C	54 ± 8°C
	T _{g2}	160 ± 9°C	155 ± 9°C
	T _{g3}	164 ± 9°C	158 ± 9°C
	ΔH	140 ± 20(J/g)	145 ± 20(J/g)

* Transportation: The material is stable during transportation at temperatures below 25°C (77°F) and 50% RH.

TYPICAL PROPERTIES OF APPLIED FILM*

Recommended Film Thickness	Average	450µm (18 mils)
	Minimum	350µm (14 mils)

Repair Material Nap-Gard 7-1888

<u>TEST / REQUIREMENT</u>	<u>METHOD</u>	<u>CRITERIA</u>	<u>RESULT</u>
Impact Resistance	CSA Z245.20-22	@-30°C (-22°F) > 1.5 J	Pass
Bending	CSA Z245.20-22	2.0°/pipe dia. @-30°C	Pass @ 14-18 mils
Weathering Resistance	No film degradation other than surface chalking shall occur within 6 months		
Adhesion	CSA Z245.20-22	95°C, 28 days	Rating 1-2, Pass
Thermal Conductivity	ASTM C177	0.09 ± 0.01 BTU/hr/ft ² /°F	
Taber Abrasion	ASTM D4060	C17 wheel, 1Kg, 1000 Cycles	40 mg removal
Cathodic Disbondment	CSA Z245.20-22 @ 14 - 18 mils	28 days, 1.5 Vdc, 65 °C	< 9 mm radius from edge
		28 days, 1.5 Vdc, 95 °C	< 9 mm radius from edge

28 days, 1.5 Vdc, 150 °C < 5 mm radius from edge

† Performance depends on film thickness. Consult Nap-Gard® Specialist for specific recommendations.

TYPICAL ELECTRICAL PROPERTIES OF FILM

<u>TEST / REQUIREMENT</u>	<u>METHOD</u>	<u>CRITERIA</u>	<u>RESULT</u>
Dielectric Strength	ASTM D149	@ 250µm (10 mils)	1500 volts/mil
Dielectric Constant	ASTM D150		2.14 @ 1 MHz
Breakdown Voltage	ASTM D149	volts @ 450µm (18 mils)	20K
Volume Resistivity	ASTM D257		3.3 x 10 ¹⁵ ohm-cm

CURE† SCHEDULE GUIDELINES



The cure profile and schedule for Nap-Gard® Product No. 7-2555 shows the minimum time at temperature required to achieve the typical performance properties of the coating. Because pipe cooling rates vary so widely with pipe wall thickness, no allowance has been made for heat loss from the pipe but this can be easily measured on the coating line and allowance made. Care should be taken to avoid exceeding the maximum time due to the potential loss of certain properties such as flexibility and impact. For detailed application guide, please contact Nap-Gard specialist.

Recommended powder application temperature range is listed below and post heating is not a normal requirement. The minimum post application curing temperature (as measured on the coated pipe), and the time to quench may conform to the following cure schedule:

7-2555		7-2555LG	
Application Temperature	Min Time to Quench†	Application Temperature	Min. Time to Quench†
218°C (425°F)	120 seconds	225°C (437°F)	240 seconds
232°C (450°F)	90 seconds	232°C (450°F)	180 seconds
239°C (463°F)	60 seconds	239°C (463°F)	120 seconds

† Cure is by residual heat in the pipe, therefore very light wall pipe may require additional post heat to complete cure.

‡ Recommended time to quench is based on the assumption that the listed temperature is maintained without any cool down rate. Time to quench will vary with application parameters and pipe sizes. Therefore, the above information shall be used only as a guideline by the applicator to develop proper time to quench. Cure should be verified by DSC or other methods.

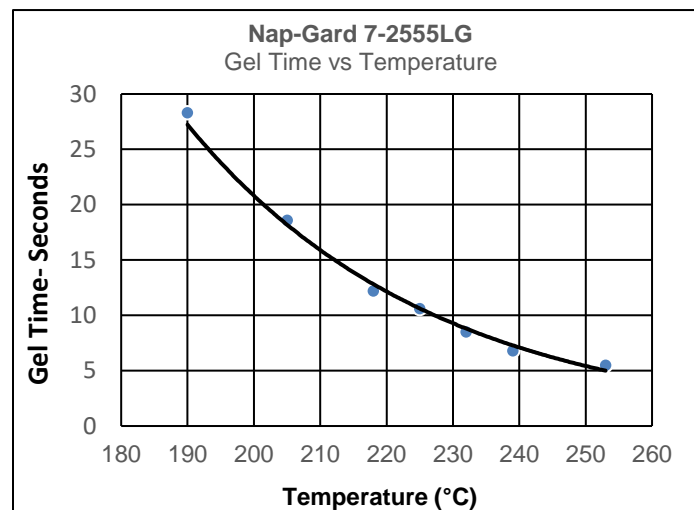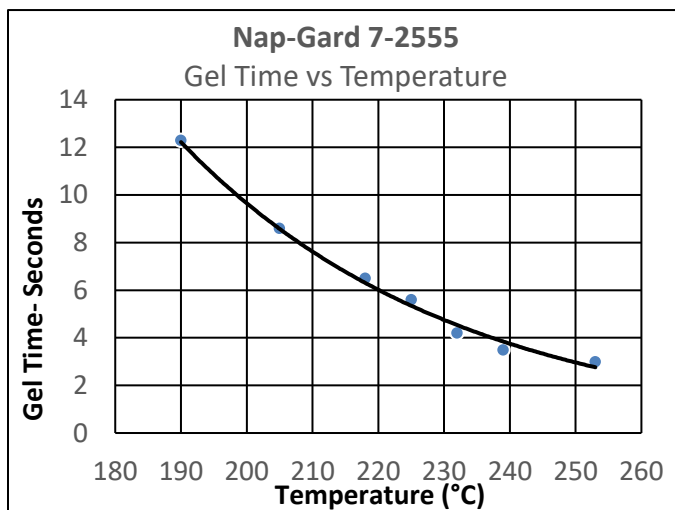

Always consult product Material Safety Data Sheet(SDS) prior to handling.

WARRANTY POLICY: Axalta Powder Coating Systems USA, Inc. ("Seller") certifies that all coatings delivered to Customer in unopened factory filled containers meet all pertinent quality standards presented in Seller's current published literature. Since matters of surface preparation, application procedures, curing procedures and other local factors that affect coating performance are beyond Seller's control; Seller assumes no liability for coating failure other than to supply replacement material for coating material proven to be defective. Customer will determine suitability of this product for its use and thereby assumes all risks and liabilities in connection therewith. Seller will not be liable for any injuries, damages or other losses derived, directly or indirectly, from or as a consequence of Customer's use of the product. **SELLER DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, RELATING TO ITS PRODUCTS AND THEIR APPLICATION, INCLUDING BUT NOT LIMITED TO WARRANTIES OF MERCHANTABILITY AND FITNESS FOR PARTICULAR PURPOSES.**